

Variable speed control of DC motor using four quadrant controlled rectifier based on Human Machine Interface

Razi Muhammad¹, Muldi Yuhendri^{1,2}

¹Department of Electrical Engineering, Faculty of Engineering, Universitas Negeri Padang, Padang, Indonesia

²Instrumentation, Control and Automation Research Group (ICARG), Universitas Negeri Padang, Padang, Indonesia

Article Info

Article history:

Received March 12, 2024

Revised April 21, 2024

Accepted May 22, 2024

Keywords:

Variable speed control

DC motor

Four quadrant

Controlled rectifier

Human Machine Interface

ABSTRACT

Various industrial equipment uses dc motors as its drive. In order for the dc motor to operate as needed, it needs to be controlled. Some of the controls applied to dc motors include control of rotation direction, speed, braking, and starting current starting. This paper proposes controlling the speed of the dc motor using a 4-quadrant controlled rectifier or phase controller using a programmable logic controller (PLC) and human machine interface (HMI) as the control center. The system design is implemented on a 1.3 HP separate amplifier dc motor. The proposed control system design is tested and validated at varying speeds. Variations in motor speed are set on the HMI screen according to needs. The test results show that the design of the dc motor speed control system using a four quadrant phase controller has worked as desired. The speed of the motor can be controlled through the HMI display.

Corresponding Author:

Razi Muhammad

Department of Electrical Engineering, Faculty of Engineering, Universitas Negeri Padang

Kampus UNP Pusat, Jl. Prof. Hamka, Air Tawar, Padang 25131, Indonesia

Email: razimhd08@gmail.com

1. INTRODUCTION

Direct Current (DC) motors are one of the motors that are widely applied in various fields as a driving force from an electric power source. Because this DC motor has several advantages, such as easy to control, large initial torque and so on [1]. Many types of DC motors can be used, including separately excited DC motors, self-excited in the form of series, shunt or compound circuits [2] - [3]. Separately excited DC motors are widely used because they are easier to control, both from the field coil side and the anchor coil side [4].

DC motors used for various purposes operate in various modes. In order for the DC motor to operate according to the desired needs, the DC motor needs to be controlled. DC motor control includes speed control, braking rotation direction and starting for large-power motors [5] - [6]. DC motor speed control is generally done using a power converter, where the type of power converter used is determined by the power source that will be connected to the DC motor. Some types of converters used include controlled rectifiers or phase control on AC sources and DC-DC converters on DC sources [7] - [8]. The converter structure used is determined by the operating capacity of the motor, where DC motor operations can be divided into four quadrants, namely quadrant 1 for forward motoring operations, quadrant 2 for reverse generating operations, quadrant 3 for reverse motoring and quadrant 4 for forward generating operations [9]-[10]. In this study, a DC motor control system is proposed using a four-quadrant controlled single-phase rectifier, so that it can be operated for all four quadrants of electric machine operations.

In working, the motor can experience interference, both due to internal influences and the influence of external parameters [11]-[13]. To minimize the interference that occurs and to improve the reliability of machine operations, a supervised machine control system has been developed. Several devices have been applied for this supervised DC motor control, such as using the Human Machine Interface [14]-[24] and

based on the Internet of Things (IoT) [25]-[35]. In this study, the DC motor speed control is supervised using HMI as the control display and the Siemens S7 1200 PLC as the control center. HMI and PLC are one of the control system devices that are widely used because of their reliability in the field [36]. The proposed control system is expected to increase the reliability of DC motor speed control.

2. METHOD

DC motor speed control using a four-quadrant phase controller based on HMI is carried out in the form of an experiment in the laboratory. The experiment starts from the design, hardware assembly, PLC and HMI program creation as well as testing and analysis. The DC motor speed control system proposed in this study can be seen from the block diagram in Figure 1 below. The control system consists of a separate amplifier DC motor as the object to be controlled, a 4-quadrant controlled 1-phase rectifier as a DC motor speed control driver, a Siemens S7 1200 1215C DCDCDC PLC as a control center, a TP700 Comfort HMI as a controller display device, a current to voltage signal converter as a tool to convert control signals from the PLC analog output in the form of a 0-20 mA current signal into a 0-10 Volt voltage signal to control the rectifier, a PC as a place to program the PLC and HMI using TIA Portal software, a 24 Volt DC power supply for the PLC and HMI and a 220 Volt 1-phase AC supply for the controlled rectifier.

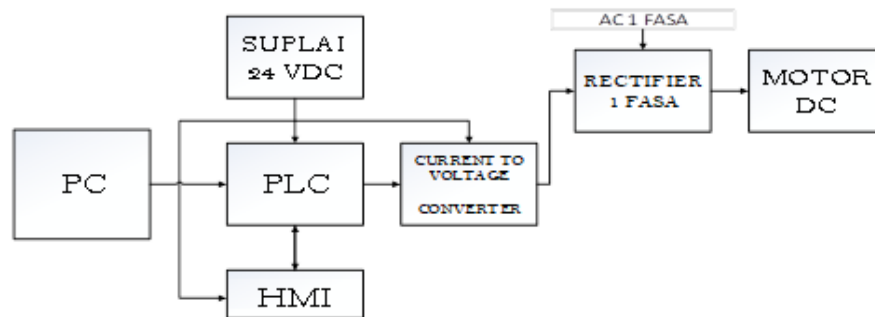


Figure 1. DC motor control block diagram

Figure 1 shows that the PLC functions as a controller center that will regulate the DC motor reference speed through the analog output terminal. The control signal will be a reference in setting the SCR switch firing angle on the controlled rectifier. This reference speed value is inputted to the HMI layer. The concept of controlling motor speed with a rectifier is done by regulating the motor anchor voltage. This anchor voltage regulation is done by regulating the SCR firing angle. The 1-phase four-quadrant rectifier used in this study consists of two controlled rectifiers in opposite directions, as shown in Figure 2 below

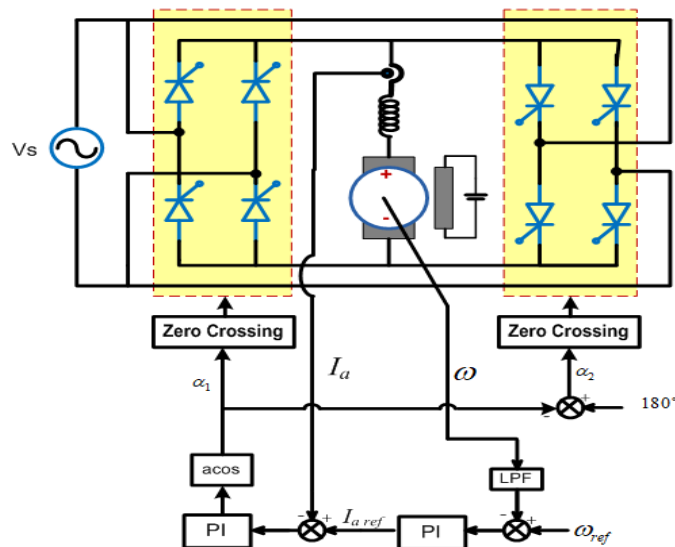


Figure 2. Scheme of DC motor speed control using four quadrant controlled rectifier

The reference speed in Figure 2 wref is input from the HMI which is controlled by the PLC. The reference speed value inputted to the HMI in rpm units is converted into a 0-20 mA current signal according to the analog output signal of the PLC. The current signal is converted into a 0-10 Volt DC voltage value using a converter according to the external input signal rating on the existing four-quadrant phase controller trainer. Figure 3 shows the hardware circuit of the DC motor speed control system using a four-quadrant phase controller based on HMI.

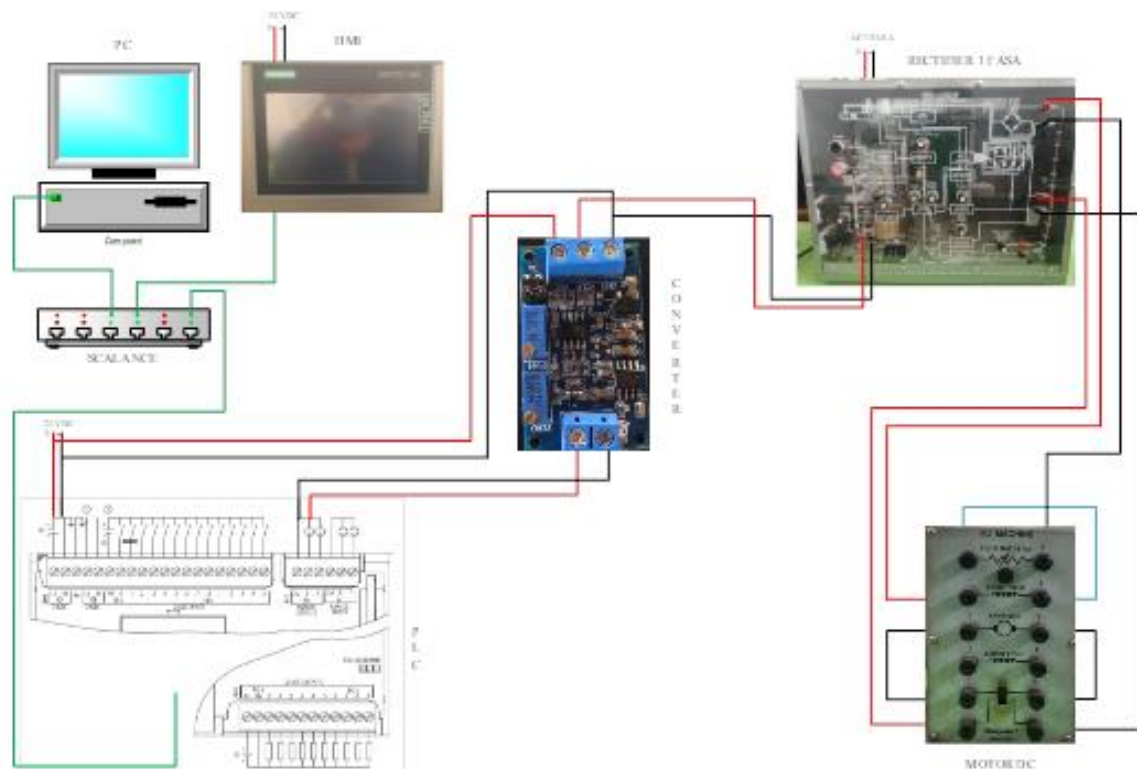


Figure 3. Circuit Schematic of DC motor speed control using four quadrant controlled rectifier based on Human Machine Interface

3. RESULTS AND DISCUSSION

The DC motor speed control system using a four-quadrant phase controller based on HMI proposed in this study was tested at varying speeds to see the validity of the reference speed inputted in the HMI layer with the real speed of the motor. Figure 4 shows the hardware installation during testing.



Figure 4. Experimental hardware setup

The first test was conducted by inputting the motor reference speed on the HMI 200 rpm. In this first test, the motor worked at a speed of 174 rpm with an anchor voltage of 30 Volts and an anchor current of 0.096 Ampere. The results of this test indicate that the actual motor speed is close to the same as the actual motor speed measured on the tachometer with an error of 26 rpm. Figure 5 shows the results of the first test.

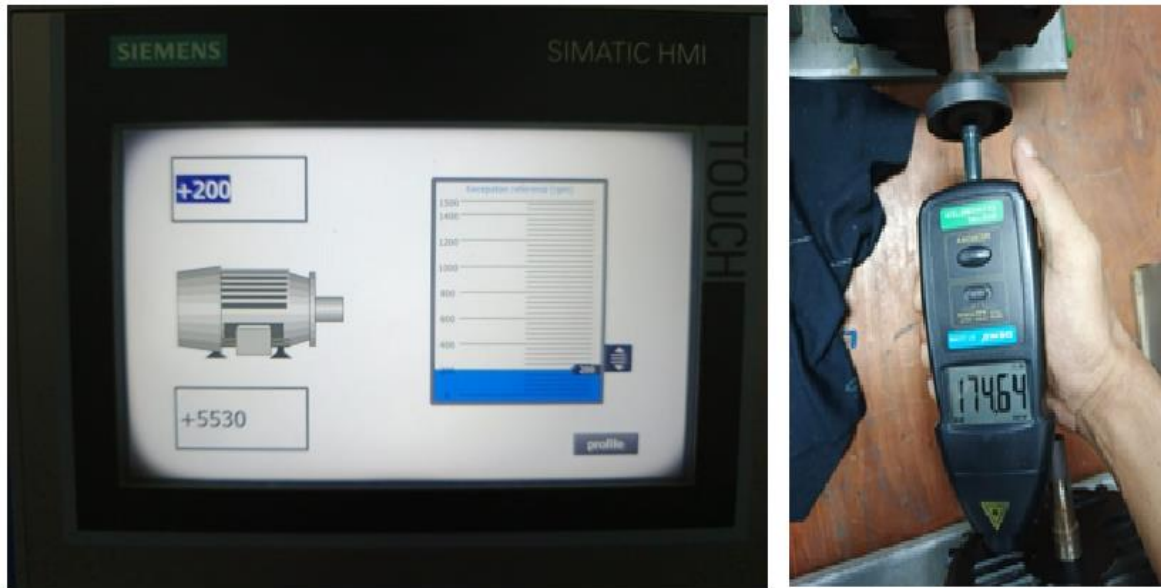


Figure 5. First test results

Next, testing was carried out with a motor reference speed on the HMI layer of 400 rpm. In this test, the actual motor speed read on the tachometer measuring instrument was 373 rpm, so there was a speed error of 27 rpm. In this test, the motor anchor current read on the measuring instrument was 0.106 Ampere with an anchor voltage of 60 Volts. The first and second tests showed that the motor anchor voltage increased when the motor reference speed was increased. This shows that the controlled rectifier can operate well in controlling the motor speed by regulating the anchor voltage. This anchor voltage regulation is done by adjusting the firing angle of the SCR switch on the rectifier. Figure 6 shows the results of the second test.



Figure 6. Second experimental results

Next, the third test was conducted with a motor reference speed of 800 rpm. In this test, the actual motor speed was obtained at 775 rpm with an anchor current of 0.124 Ampere and an anchor voltage of 127 Volts. Figure 7 shows the results of the third test.



Figure 7. Third experimental results

The results of all tests can be seen in Table 1 below. The description in Table 1 shows that the increase in speed is linear with the increase in armature voltage and armature current. This occurs because the speed control is done by adjusting the rectifier output voltage through the ignition angle setting. Figure 8 shows a graph of the rectifier output voltage when the motor speed is 200 rpm.

Table 1. Test Results

Speed reference in HMI (rpm)	Measurable speed (rpm)	Armature current (Ampere)	Armature voltage (Volt)
200	174	0,096	30
400	373	0,106	60
800	775	0,124	127



Figure 8. Rectifier output voltage graph

4. CONCLUSION

This study proposes a supervised DC motor speed control system using a four-quadrant phase controller using HMI as a motor monitoring and control device. The design of the control system was tested with varying motor speeds. The test results show that the motor speed can be controlled via HMI, where the actual motor speed value read by the measuring instrument is close to the same as the motor reference speed

inputted on the HMI layer. The test results also show that the motor armature voltage changes linearly with changes in motor speed. This shows that the controlled 1-phase rectifier has successfully controlled the motor speed through the armature voltage regulation, where this voltage regulation is done by adjusting the firing angle of the SCR in the controlled rectifier.

REFERENCES

- [1] A. Ma'arif and A. Çakan, "Simulation and arduino hardware implementation of dc motor control using sliding mode controller," *J. Robot. Control*, vol. 2, no. 6, pp. 582–587, 2021, doi: 10.18196/jrc.26140.
- [2] C. Martínez-García, C. Astorga-Zaragoza, V. Puig, J. Reyes-Reyes and F. López-Estrada, "A Simple Nonlinear Observer for State and Unknown Input Estimation: DC Motor Applications," *IEEE Transactions on Circuits and Systems II: Express Briefs*, vol. 67, no. 4, pp. 710–714, April 2020, doi: 10.1109/TCSII.2019.2920609.
- [3] M. I. Esario and M. Yuhendri, "Kendali Kecepatan Motor DC Menggunakan DC Chopper Satu Kuadran Berbasis Kontroler PI," *JTEV (Jurnal Tek. Elektro dan Vokasional)*, vol. 6, no. 1, p. 296, 2020, doi: 10.24036/jtev.v6i1.108005.
- [4] M. M. R. Ahmed, A. A. Elemery, Z. M. Alaas, and A. M. Hamada, "Torque control of a 5 KW, 220 V separately excited DC motor using microcomputer," *Int. J. Power Electron. Drive Syst.*, vol. 14, no. 2, pp. 727–740, 2023, doi: 10.11591/ijpeds.v14.i2.pp727-740.
- [5] I. Okoro and C. Enwerem, "Model-based Speed Control of a DC Motor Using a Combined Control Scheme," *IEEE PES/IAS PowerAfrica Conf. Power Econ. Energy Innov. Africa, PowerAfrica 2019*, pp. 1–6, 2019, doi: 10.1109/PowerAfrica.2019.8928856.
- [6] S. Sachit and B. R. Vinod, "MRAS Based Speed Control of DC Motor with Conventional PI Control — A Comparative Study," *Int. J. Control. Autom. Syst.*, vol. 20, pp. 1–12, 2022.
- [7] F. Rahmadi and M. Yuhendri, "Kendali Kecepatan Motor DC Menggunakan Chopper DC Dua Kuadran Berbasis Kontroler PI," *JTEIN J. Tek. Elektro Indones.*, vol. 1, no. 2, p. 241, 2020, doi: <https://doi.org/10.24036/jtein.v1i2.71>.
- [8] L. Zhang, J. Yang, and S. Li, "A Model-Based Unmatched Disturbance Rejection Control Approach for Speed Regulation of a Converter-Driven DC Motor Using Output-Feedback," *IEEE/CAA J. Autom. Sin.*, vol. 9, no. 2, pp. 365–376, 2022.
- [9] N. L. Manuel, N. İnanç, and M. Lüy, "Control and performance analyses of a DC motor using optimized PID and fuzzy logic controller," *Results Control Optim.*, vol. 13, no. May, 2023, doi: 10.1016/j.rico.2023.100306.
- [10] S. Hajari and O. Ray, "A Dynamic Voltage-Based Current Estimation Technique for DC Motor Speed Control Applications," *IEEE Sensors Lett.*, vol. 8, no. 2, 2024.
- [11] F. Hanifah and M. Yuhendri, "Kontrol dan Monitoring Kecepatan Motor Induksi Berbasis Internet of Things," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 2, pp. 519–528, 2023.
- [12] M. A. Mhawesh, "Performance comparison between variants PID controllers and unity feedback control system for the response of the angular position of the DC motor," *Int. J. Electr. Comput. Eng.*, vol. 11, no. 1, pp. 802–814, 2021, doi: 10.11591/ijece.v11i1.pp802-814.
- [13] T. H. Mohamed, M. A. M. Alamin, and A. M. Hassan, "Adaptive position control of a cart moved by a DC motor using integral controller tuned by Jaya optimization with Balloon effect," *Comput. Electr. Eng.*, vol. 87, no. July, 2020, doi: 10.1016/j.compeleceng.2020.106786.
- [14] A. Salkic, H. Muhovic, and D. Jokic, "Siemens S7-1200 PLC DC Motor control capabilities," *IFAC-PapersOnLine*, vol. 55, no. 4, pp. 103–108, 2022, doi: 10.1016/j.ifacol.2022.06.017.
- [15] R. Saputra and M. Yuhendri, "Pembuatan Job Sheet Kendali Motor Servo Menggunakan Variable Speed Drive," *J. Pendidik. Tek. Elektro*, vol. 04, no. 01, pp. 117–124, 2023.
- [16] F. Liu, X. ming, D. Lei and X. He, "Design of DC motor operation monitoring system based on Matlab GUI," *2021 IEEE 5th Advanced Information Technology, Electronic and Automation Control Conference (IAEAC)*, Chongqing, China, 2021, pp. 1211–1215, doi: 10.1109/IAEAC50856.2021.9390686.
- [17] I. Rifaldo and M. Yuhendri, "Sistem Monitoring Kecepatan Motor Induksi dengan HMI Berbasis PLC," *JTEIN J. Tek. Elektro Indones.*, vol. 3, no. 2, pp. 319–325, 2022.
- [18] P. R. Babu *et al.*, "Web Server Based Soft Starter for DC Shunt Motor," *2023 International Conference on Circuit Power and Computing Technologies (ICCPCT)*, Kollam, India, 2023, pp. 1026–1031, doi: 10.1109/ICCPCT58313.2023.10245416.
- [19] I. Ikhwani and M. Yuhendri, "Penyusunan Jobsheet Kendali Motor Servo Berbasis Human Machine Interface," *J. Pendidik. Tek. Elektro*, vol. 4, no. 1, pp. 350–357, 2023, doi: 10.24036/jpte.v4i1.268.
- [20] P. Wong *et al.*, "Using Programmable Logic Controllers to Simulate Common Motor Load Curves in Industry," *2019 11th International Symposium on Advanced Topics in Electrical Engineering (ATEE)*, Bucharest, Romania, 2019, pp. 1–6, doi: 10.1109/ATEE.2019.8725017.
- [21] M. H. Ridwan, M. Yuhendri, and J. Sardi, "Sistem Kendali Dan Monitoring Pompa Air Otomatis Berbasis Human Machine Interface," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 2, pp. 592–600, 2023.
- [22] C. -C. Hsiao and H. -Y. Chen, "Development of Human-machine Interactive Interface for Hosiery Waterproof Coating Production Line," *2022 IEEE 4th Eurasia Conference on IOT, Communication and Engineering (ECICE)*, Yunlin, Taiwan, 2022, pp. 274–277, doi: 10.1109/ECICE55674.2022.10042839.
- [23] S. Fajri and M. Yuhendri, "Monitoring Pembangkit Listrik Tenaga Angin Menggunakan Human Machine Interface," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 1, pp. 434–444, 2023.
- [24] S. Anjeli and M. Yuhendri, "Kendali dan Monitoring Charger Baterai dari Panel Surya Berbasis Human Machine Interface," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 1, pp. 105–114, 2023.
- [25] R. Nabil, Z. Mokhtar, and C. Soufyane, "An Efficient Fuzzy PI Approach to Real-time Control of a ROS Based Mobile Robot," *Prz. Elektrotechniczny*, vol. 98, no. 2, pp. 1–5, 2022, doi: 10.15199/48.2022.02.01.
- [26] B. Kaliappan, B. Srirevathi, S. M. Balaganesan and A. Rajesh, "Internet of Things (IoT) based BAT Algorithm with PIC Controller Optimization of BLDC Motor fed ZETA Converter," *2022 2nd International Conference on Power Electronics & IoT Applications in Renewable Energy and its Control (PARC)*, Mathura, India, 2022, pp. 1–5, doi: 10.1109/PARC52418.2022.9726578.
- [27] Y. A. Putra and M. Yuhendri, "Smart Monitoring Pompa Air Otomatis Berbasis Human Machine Interface Dan Internet Of Things," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 2, pp. 863–876, 2023.
- [28] Y. B. Chu, Y. C. Zhang and Y. T. Lim, "IoT Based Real Time Power Consumption Monitoring and Characterization of Loaded

- DC Motor," *2023 11th International Conference on Smart Grid and Clean Energy Technologies (ICSGCE)*, Kuala Lumpur, Malaysia, 2023, pp. 30-35, doi: 10.1109/ICSGCE59477.2023.10420206.
- [29] Y. D. Satriani and M. Yuhendri, "Kontrol Posisi Motor Servo Berbasis Human Machine Interface dan Internet of Things," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 2, pp. 949–956, 2023.
- [30] E. Kougianos, S. P. Mohanty, G. Coelho, U. Albalawi and P. Sundaravadivel, "Design of a High-Performance System for Secure Image Communication in the Internet of Things," *IEEE Access*, vol. 4, pp. 1222-1242, 2016, doi: 10.1109/ACCESS.2016.2542800.
- [31] A. F. Ikhfa and M. Yuhendri, "Monitoring Pemakaian Energi Listrik Berbasis Internet of Things," *JTEIN J. Tek. Elektro Indones.*, vol. 3, no. 1, pp. 257–266, 2022.
- [32] M. Kande, A. J. Isaksson, R. Thottappillil and N. Taylor, "Rotating electrical machine condition monitoring automation—A review", *Machines*, vol. 5, no. 4, pp. 24, Oct. 2017.
- [33] R. Mayangsari and M. Yuhendri, "Sistem Kontrol dan Monitoring Pembangkit Listrik Tenaga Surya Berbasis Human Machine Interface dan Internet of Thing," *JTEIN J. Tek. Elektro Indones.*, vol. 4, no. 2, pp. 738-749–738 – 749, 2023.
- [34] D. Ganga and V. Ramachandran, "IoT-Based Vibration Analytics of Electrical Machines," *IEEE Internet of Things Journal*, vol. 5, no. 6, pp. 4538-4549, Dec. 2018, doi: 10.1109/JIOT.2018.2835724.
- [35] O. Barybin, E. Zaitseva and V. Brazhnyi, "Testing the security ESP32 internet of things devices", *2019 IEEE International Scientific-Practical Conference Problems of Infocommunications Science and Technology (PIC S&T)*, pp. 143-146, October. 2019.
- [36] F. Beltran-Carbajal, R. Tapia-Olvera, A. Valderrabano-Gonzalez, H. Yanez-Badillo, J. C. Rosas-Caro, and J. C. Mayo-Maldonado, "Closed-loop online harmonic vibration estimation in DC electric motor systems," *Appl. Math. Model.*, vol. 94, pp. 460–481, 2021, doi: 10.1016/j.apm.2021.01.021